


## The CM-BE3815NVR Exterior IR Bullet Camera

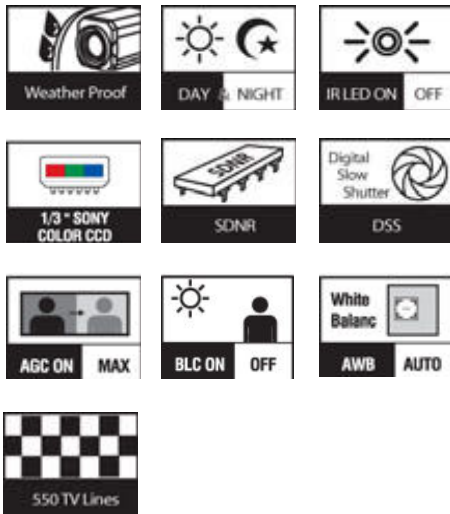

### Key Features

- 1/3 inch SONY Super HAD CCD
- High Resolution : 550TV Lines
- DC Iris Varifocal lens (f=3.8~9.5m F1.2)
- Built-in IR LED (42EA) & Sensor(1EA)
- True Day & Night (ICR)
- SDNR (Super Digital Noise Reduction)
- Electronic sensitivity-up (DSS)
- AWB, AGC/BLC/Flickerless (On/Off)
- Min Illumination : Night (0.00Lux, IR LED On)
- External (Zoom/Focus, Near/Far) Adjustment
- AC24V/DC12V Dual Voltage
- IP65 rated and built in Fan/Heater

ITEM	BE3815NVR	BE3815PVR
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Frequency (VH)	15.734KHz	15.625KHz
Frequency (V)	59.94Hz	50Hz
Image Sensor	1/3" SONY Super HAD CCD	
Total Pixels	811H x 508V (410K)	795H x 596V (470K)
Effective Pixels	768H x 494V(380K)	752H x 582V(440K)
Resolution	550 TV Lines	
Video Output	1.0 Vp-p (75 ohm Composite)	
S/N Ratio	More than 50dB (AGC Off)	
Lens	DC Iris Vari-focal Lens (f=3.8~9.5mm F1.2)	
Digital Zoom ratio	2x (On/Off)	
Min. Illumination	Day: 0.3Lux, Night (0.00Lux, IR LED On)	
IR LED & Sensor	IR LED (850nm, 30') 42ea, Sensor 1 ea.	
IR LED Visible Range	Max 40M.	
Day & Night (ICR)	ICR Sensor Type	
SDNR	Auto	
DSS	On/Off (Max 32 Fld)	
White Balance	Auto	
AGC, BLC, Flickerless	On/Off	
IP Rating	IP65	
Power Supply	DC12V / AC24V	
Dimension/Weight	83(Ø) X 160.4 (H) mm / Approx. 1.1kg	